


Linus 150




Struttura inox + alluminio lucido  
 Stainless steel frame + polished aluminium  
 Structure inox + aluminium brillant  
 Inox Struktur + Aluminium weiß  
 Estructura en acero inox + aluminio lustroso

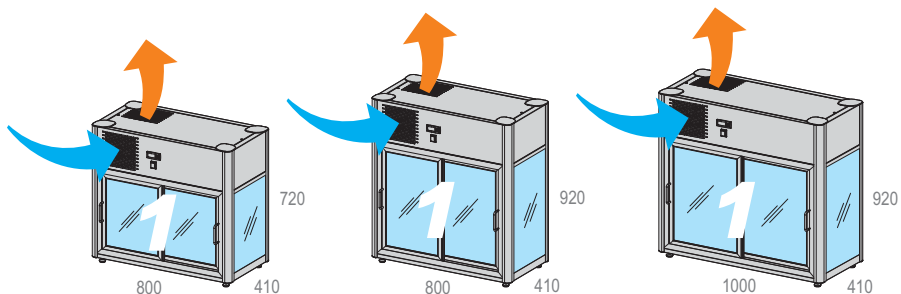


<b>Linus 100</b>	Lt. 100	Watt 320	n. 1 mm. 685x292	°C +4/+10	% U.R. 70	AUT	230v/1/50Hz	R404a	Kg. 70
<b>Linus 150</b>	Lt. 160	Watt 320	n. 2 mm. 685x292	°C +4/+10	% U.R. 70	AUT	230v/1/50Hz	R404a	Kg. 85
<b>Linus 200</b>	Lt. 200	Watt 320	n. 2 mm. 899x292	°C +4/+10	% U.R. 70	AUT	230v/1/50Hz	R404a	Kg. 95

## GOLOSO

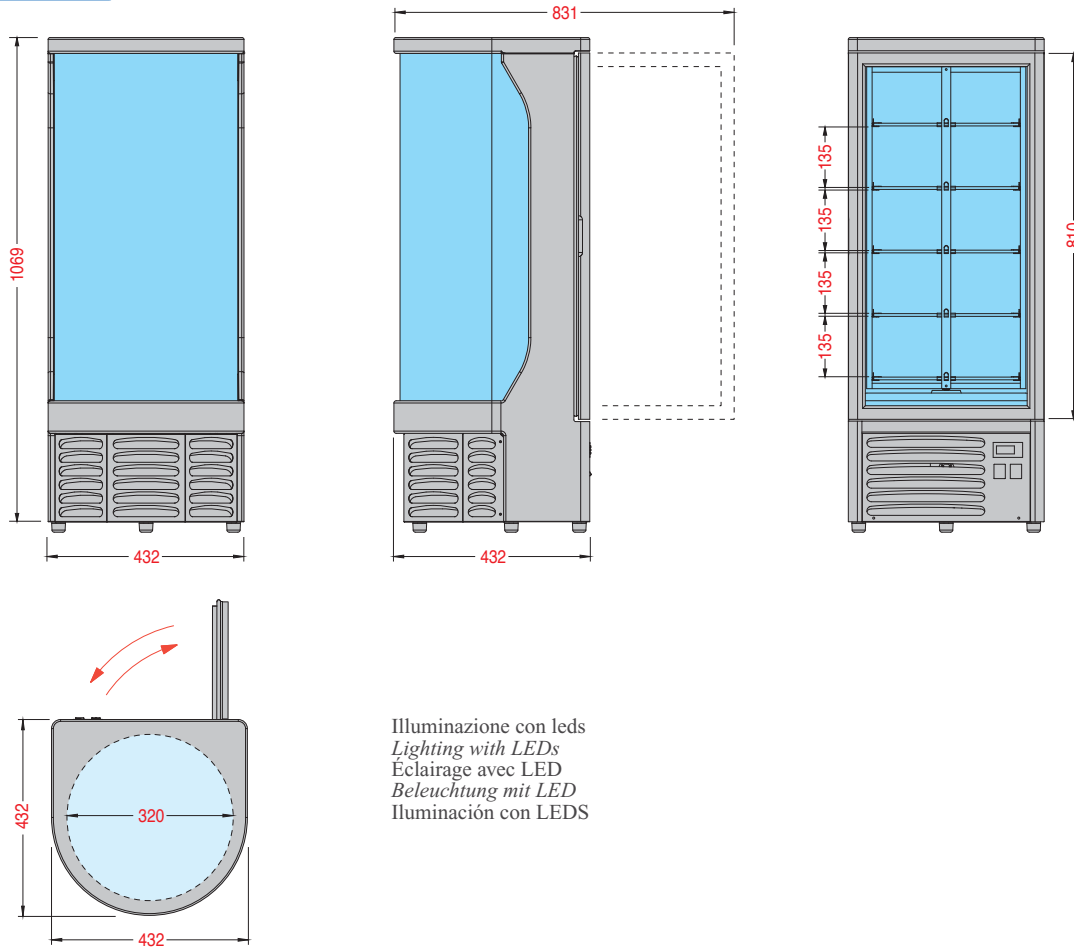


Illuminazione con leds  
 Lighting with LEDs  
 Éclairage avec LED  
 Beleuchtung mit LED  
 Iluminación con LEDS


## LINUS 642 DRY

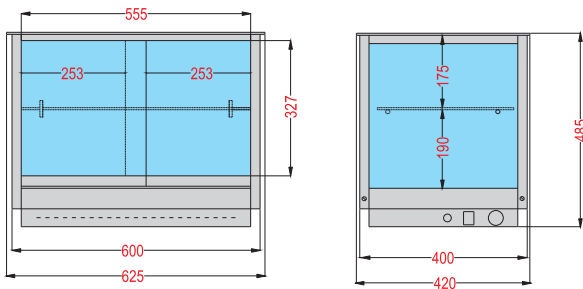


## LINUS 842 DRY

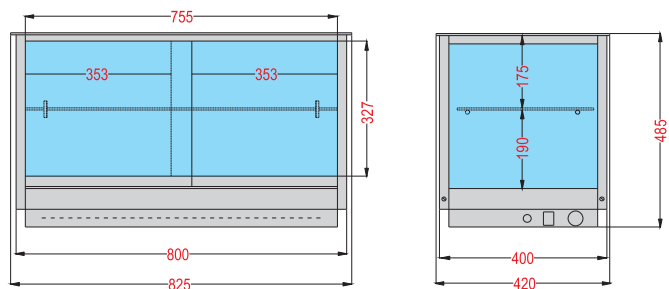


## LINUS 1042 DRY

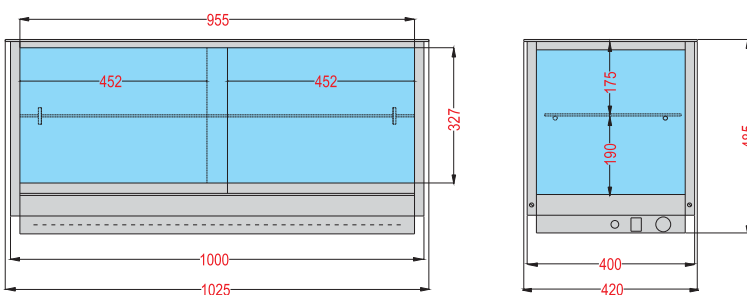


## LINUS 100

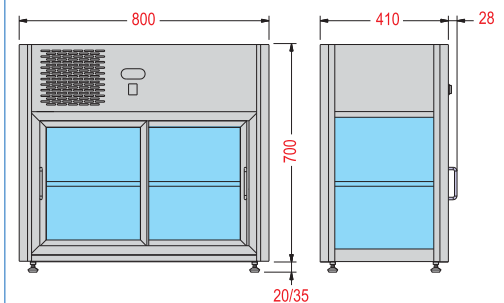


LINUS 150

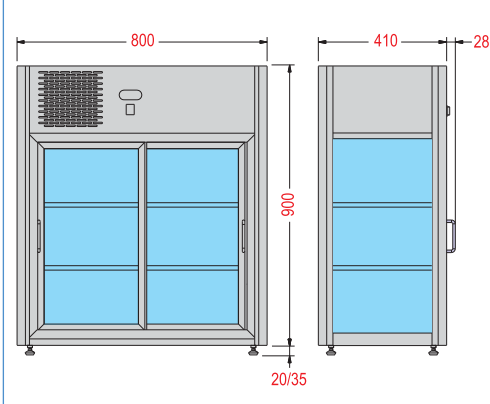


LINUS 200

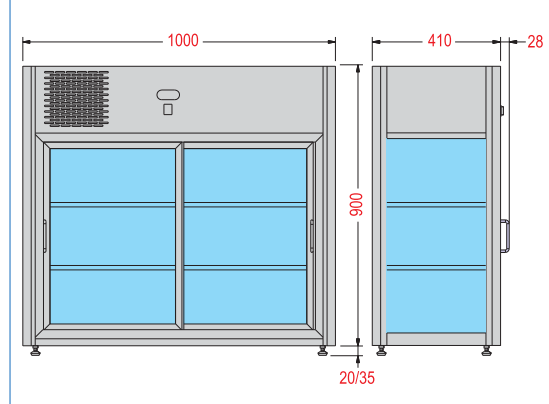


ORIZONT 100 Q

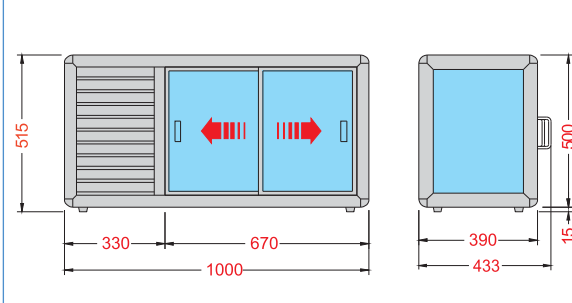


ORIZONT 150 Q

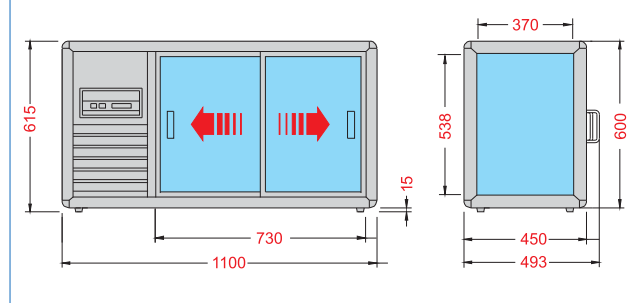


ORIZONT 200 Q Self Service

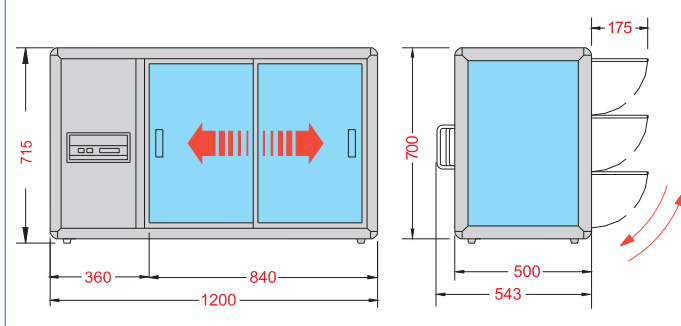

ORIZONT 200 Q

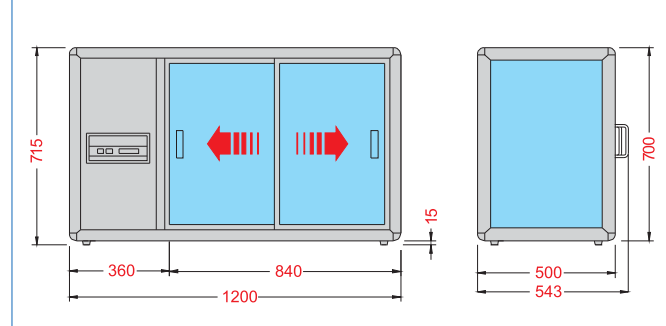

ORIZONT 202 Q Hot

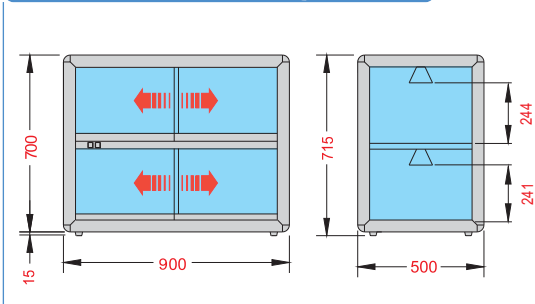

ORIZONT 200 Q Neutral

